


Grey Standard Open Slot Trunking

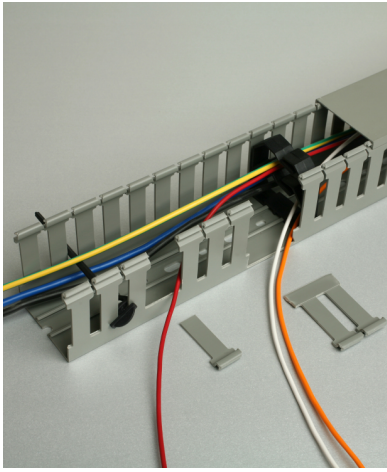

CZE Standard Slot

Order Code	Dimensions	Pack Qty
	Base x Height (mm)	(metres)
CZE20*	15 x 17	120
CZE22*	15 x 30	96
CZE16	25 x 30	80
CZE23	40 x 30	48
CZE24	60 x 30	32
CZE25*	15 x 40	72
CZE13	25 x 40	60
CZE8	40 x 40	40
CZE4	60 x 40	24
CZE26	80 x 40	24
CZE27	100 x 40	16
CZE28	120 x 40	16
CZE7	25 x 60	40
CZE5	40 x 60	36
CZE9	60 x 60	24
CZE6	80 x 60	24
CZE17	100 x 60	20
CZE10	120 x 60	16
CZE30	150 x 60	12
CZE31	200 x 60	8
CZE14	25 x 80	32
CZE15	40 x 80	24
CZE11	60 x 80	24
CZE12	80 x 80	24
CZE19	100 x 80	16
CZE32	120 x 80	16
CZE33	150 x 80	12
CZE48	200 x 80	8
CZE34	25 x 100	24
CZE35	40 x 100	16
CZE18	60 x 100	16
CZE36	80 x 100	16
CZE37	100 x 100	16
CZE38	120 x 100	8
CZE39	150 x 100	8
CZE40	200 x 100	8
CZE43	100 x 150	8

***Note: Trunking with 4mm slots**

General Characteristics

Wiring ducts with large fingers and larger slots for easy insertion of larger wires and cables. Lead free.

- Smooth wire entry allows for quick insertion of wires
- Built-in wire retainer - double restricted slots on some sizes
- Smooth fingers will not injure the installer or damage cables
- Staggered mounting hole pattern for use in cabinets which are designed to these standards.
- Double scoreline allows easy removal of wall section or individual fingers by hand without the use of tools
- Non-slip cover with exclusive cover design with maximum grip
- RoHS Certified - Lead Free
- Manufactured in 2m lengths

Technical Characteristics

- Wire ducts with 8mm slots (4mm for CZE20, 22 & 25)
- Self extinguishing rigid PVC Class 1 (UL94-VO)
- Colour: Grey - RAL7030

Certifications and compliance

- A Norme EN50085-2-3
- CSA
- UR
- RINA
- CE marked